


# Hydrogen Sulphide H<sub>2</sub>S

No.4LB

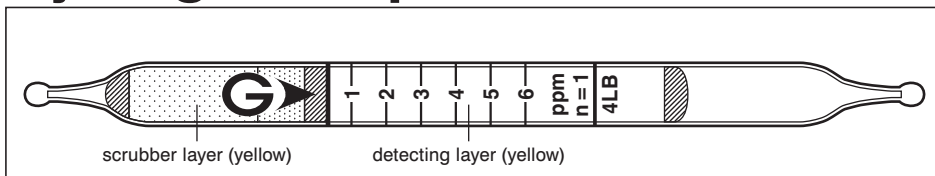

## Performance

Measuring range	0.5 to 1 ppm	1 to 6 ppm	6 to 12 ppm
Number of pump strokes	2 (200ml)	1 (100ml)	1/2 (50ml)
Correction factor	0.5	1	2
Sampling time	2 min	1 min	30 sec

Detecting limit : 0.07 ppm (2 pump strokes)

Colour change : Yellow → Pink

Corrections for temperature & humidity : Unnecessary

Relative standard deviation : 5% (for 1 to 6 ppm)

Shelf life : 2 years

## Reaction principle

Hydrogen sulphide reacts with the reagent to form intermediate material which stains indicator pink.

## Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Ammonia	≧ 2.3 ppm	-	No
Ethyl mercaptan	≧ 0.5 ppm	+	Pink (≧ 0.4 ppm)
Hydrogen chloride	≧ 4.5 ppm	+	Pink (≧ 4.0 ppm)
Hydrogen cyanide	≧ 0.1 ppm	+	Pink (≧ 0.1 ppm)
Nitric acid	≧ 6.0 ppm	+	Pink (≧ 5.0 ppm)
Sulphur dioxide	≧ 1.0 ppm	+	Pale pink (≧ 0.7 ppm)
Nitrogen dioxide	≧ 3.5 ppm	-	Pink (≧ 8.0 ppm)
Hydrogen fluoride	≧ 13.0 ppm	+	Pink (≧ 10.0 ppm)

## Calibration gas generation

Permeation tube method