


# Nitrogen Dioxide NO<sub>2</sub>

No.9L

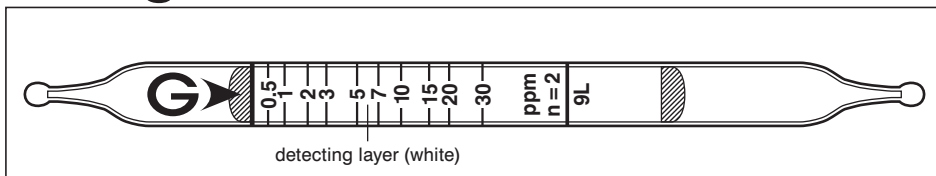

## Performance

Measuring range	0.5 to 30 ppm	30 to 125 ppm
Number of pump strokes	2 (200 ml)	1 (100 ml)
Correction factor	1	by scale
Sampling time	1 min	30 sec

Detecting limit : 0.1 ppm (2 pump strokes)  
 Colour change : White → Yellowish orange  
 Corrections for temperature & humidity : Unnecessary  
 Relative standard deviation : 10 % (for 0.5 to 10 ppm), 5 % (for 10 to 30 ppm)  
 Shelf life : 3 years

## Reaction principle

NO<sub>2</sub> + o-Tolidine → Yellowish orange product

## Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Bromine, Chlorine	≥ 1/5	+	Yellowish orange
Nitric oxide	≥ 50 ppm	Unclear demarcation	Pale red
Ammonia		No	} No
Carbon dioxide		No	
Carbon monoxide		No	
Organic gases and vapour		No	
Sulphur dioxide	≥ 10 ppm	– (Bleaching)	

## Other substance measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
Iodine	Factor : 0.4	2	0.2 to 12 ppm

## Calibration gas generation

Permeation tube method